



CARGO BASEPLATE INSTALLATION

Jeep Wrangler (JK) – 2 / 4 Door
2007 - 2017





Contents

2 DOOR KIT CONTENTS.....4

4 DOOR KIT CONTENTS.....4

REQUIRED TOOLS5








INSTALLATION6

OPTIONAL ACCESSORIES INSTALLATION 10






LIMITED NON-TRANSFERABLE WARRANTY 11



2 door Kit Contents






Part	Part Number	Image	Qty.
2 door Baseplate Assembly Front & Rear Brackets	5012362		1
¼"-20 x 1" leveling foot			2
¼"-20 x ½" leveling foot			3
M6 x ½" (12mm) Mounting hardware for slide assemblies (extra hardware included for 2nd slide assembly)			16
M6 x 22mm Washers			8
M6 x 20mm forward tension bolt			2
Rubberized forward tension bolt cap			2

4 door Kit Contents

Part	Part Number	Image	Qty.
Baseplate Assembly Front & Rear Brackets	5012271		1
M6 x 25mm leveling foot			2
M6 x 12mm leveling foot			3
M6 x 12mm Mounting hardware for slide assemblies (extra hardware included for 2nd slide assembly)			16
M6 x 22mm Washers			8



REQUIRED TOOLS

Tool Description	Image
✓ T-30 Torx Bit - (Also included in optional Jeep Tool Kit)	
✓ Bit Driver - (Also included in optional Jeep Tool Kit)	
✓ Torque Wrench	
✓ 10mm socket	
✓ Ratchet	



INSTALLATION

Baseplate bracket installation differs between the Jeep Wrangler 2 door and 4 door. Begin your installation using the legend below.

IMPORTANT

Before proceeding, make sure to relocate the factory jack assembly located in the rear storage compartment to ensure ease of access during an emergency situation.

Jeep Wrangler 2 Door	For baseplate installation follow steps 1-7
Jeep Wrangler 4 Door	For baseplate installation follow steps 8-13

Step	Image	Description
1.		<p>2 DOOR BASEPLATE INSTALLATION</p> <p>Remove rear seat per manufacturer's recommendations.</p> <p>IMPORTANT</p> <p>The rear seat and Webasto Cargo Baseplate for a 2 door Jeep Wrangler cannot be installed at the same time.</p>
2.		<p>Install the supplied leveling feet in the circled weld nuts on the bottom side of each baseplate as shown.</p> <p>2 - M6 x 25mm - Forward-most baseplate</p> <p>3 - M6 x 12mm - Rear-most baseplate</p>
3.		<p>Install the forward-most baseplate bracket starting by positioning the retainer tabs under the O.E. rear seat bracket assembly as shown.</p>



Cargo Baseplate Installation

Step	Image	Description
4.		<p>Install the retainer tension bolts as shown in the adjacent bolt stack-up. Tighten until snug but to be careful not to rupture the rubber tension bolt cap.</p>
5.		<p>Locate and remove the rear-most O.E. tie down hardware.</p>
6.		<p>Align the rear mounting holes of the rear-most baseplate bracket and secure with O.E. hardware. Torque to 6 ft. lbs.</p>
7.		<p>Level front and rear baseplates to equal height by adjusting the leveling feet installed in step 2.</p> <p>IMPORTANT</p> <p>This installation is designed to work with O.E. rear floor mat installed. Removal of this mat is not necessary.</p>

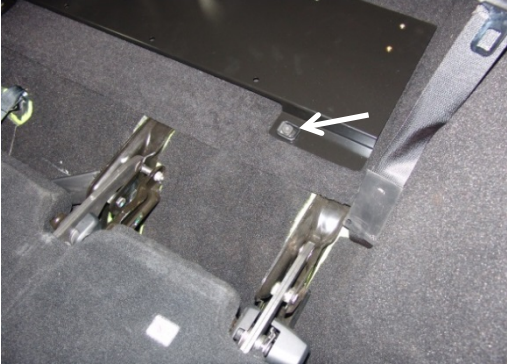
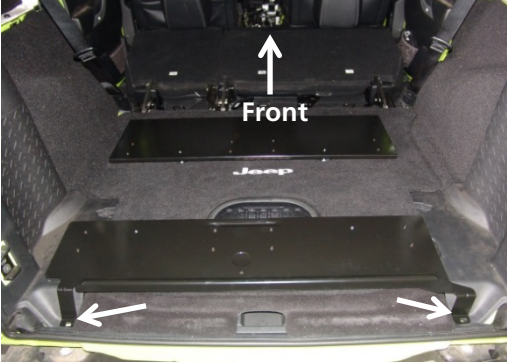



Cargo Baseplate Installation

Step	Image	Description
8.		<p>4 DOOR BASEPLATE INSTALLATION</p> <p>Lower rear seats per manufacturers recommendations. Remove 4 ties down bolts as shown.</p>
9.		<p>Install the supplied leveling feet in the circled weld nuts on the bottom side of each baseplate as shown.</p> <p>2 - M6 x 25mm – Forward-most baseplate</p> <p>3 - M6 x 12mm - Rear-most baseplate</p>
10.		<p>Position forward-most baseplate by aligning mounting tab holes to existing tie down holes in floor of vehicle.</p>




Cargo Baseplate Installation

Step	Image	Description
11.		Re-install O.E. tie down bolts in forward-most mounting holes and torque to 6 ft. lbs.
12.		Position rear-most baseplate by aligning mounting tab holes to the existing tie down holes in floor of vehicle. Torque to 6 ft. lbs.
13.		Level front and rear baseplates to equal height by adjusting the leveling feet installed in step 9. IMPORTANT This installation is designed to work with O.E. rear floor mat installed. Removal of this mat is not necessary.



OPTIONAL ACCESSORIES INSTALLATION

Accessory	Part Number
FF31 Kit with handles	5012267
Slide Assembly Kit with ties downs	5012269

<p>1.</p>		<p>Slide Assembly Installation</p> <p>Using the supplied M6 x 12mm bolts (8 per slide); tighten the slide assembly to the baseplate as shown. Torque to 6 ft. lbs.</p> <p>To access slide assembly retainer holes, open slide assembly by turning the release handle in an upward motion while pulling back.</p> <p>NOTE</p> <p>Repeat this step if installing a second slide assembly.</p>
<p>2.</p>		<p>Fridge / Freezer Installation</p> <p>With the Fridge / Freezer grab handles installed per supplied instructions, set the Fridge / Freezer on the slide assembly. Using the 4 tie downs (supplied with slide assembly) secure the Fridge / Freezer as shown.</p> <p>IMPORTANT</p> <p>After ties downs have been properly secured, make sure to trim excess tie down strap material to prevent jamming of the slide lock mechanism.</p>
<p>3.</p>		<p></p> <p>When installing the 12V Fridge / Freezer wiring harness, route the harness through the rear handle first. This will ensure the harness doesn't interfere with the slide assembly tracks during slide use.</p>



LIMITED NON-TRANSFERABLE WARRANTY

Webasto Thermo & Comfort North America, Inc. (hereinafter referred to as Webasto) warrants their Cargo Storage and Security Surround for Jeep Wrangler against defects in material and workmanship for one (1) year from date of purchase.

Replacement parts are covered for six (6) months or the remainder of the original warranty period, whichever is longer.

The intent of the Webasto warranty is to protect the original end-user of the Cargo Storage and Security Surround for Jeep Wrangler from defects and provide free repair and replacement of defective parts in the manner provided herein. During the warranty period, the exclusive remedy will be for Webasto, at their discretion, to repair or replace those parts which are demonstrated to be defective in material or workmanship.

For warranty claims or returns please contact Webasto at:

Phone: (800) 860-7866 in USA | (800) 667-8900 in Canada

Limitations: Webasto specifically excludes and limits warranty from the following:

- Damage to product in transit. All claims must be filed with carrier.
- Improper installation, which is not in accordance with valid, supplied installation instructions.
- Deterioration due to normal wear, corrosion, abuse, damage, accident, improper storage or operation, lack of reasonable and necessary maintenance.
- Modification of product by alteration, use of non-genuine parts or repair by unauthorized personnel.
- Economic loss for expenses related to travel, vehicle disability, personal injury or other incidental or consequential damages arising from any breach of this expressed warranty.

THIS WARRANTY IS NON-TRANSFERABLE. IMPLIED WARRANTIES INCLUDING THAT OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE ARE EXPRESSLY LIMITED TO THE DURATION OF THIS WARRANTY. WEBASTO DISCLAIMS ANY LIABILITY FOR SPECIAL, INCIDENTAL OR CONSEQUENTIAL DAMAGES.

SOME STATES AND CANADIAN PROVINCES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATION OR EXCLUSIONS MAY NOT APPLY TO YOU. THIS WARRANTY GIVES YOU SPECIFIC LEGAL RIGHTS, AND YOU MAY ALSO HAVE OTHER RIGHTS WHICH VARY AMONG STATES AND CANADIAN PROVINCES.

WEBASTO RETAINS THE RIGHT TO MODIFY THESE WARRANTY TERMS WITHOUT NOTICE IN ORDER TO COMPLY WITH POLICY OR LAWS GOVERNING WARRANTY ISSUES IN STATES OR COUNTRIES HAVING SPECIFIC REMEDIES DIFFERING OR ADDITIONAL TO THOSE DESCRIBED WITHIN THIS DOCUMENT.



Webasto Thermo & Comfort N.A., Inc.

15083 North Road
Fenton, MI 48430 USA
Phone: 810-593-6000
Fax: 810-593-6001

Org. 10/2016 | Rev. 2/2017 | P/N: 5012386A

Internet: <http://www.blackforestgear.com>