



Installation Instructions

Sport Bar Covers for 04-06 Jeep® LJ Wrangler

Item #12206224



Part List:

Main Sport Bar Cover - Qty 1
Horizontal Covers - Qty 2

Required Tools:

Safety Glasses
T50 Torx Bit and Driver
T30 Torx bit

WARNING

This product is designed to enhance the look of your vehicle. NEVER rely in any way on this product or its components to protect the occupants of the vehicle from injury or death in the event of an accident. This product will not contain the occupants in the vehicle. This product will not protect the occupants from falling objects or impact from other vehicles. Always wear your seat belts and never operate the vehicle in excess of the manufacturer's specifications.

CAUTION

RISK OF EYE INJURY. Safety glasses should be worn at all times while installing or maintaining this product.

Important Safety Information

Your MasterTop® Sport Bar Cover is intended to enhance the appearance of your off-road capable vehicle. Before installation, please take a moment to review the following safety information and installation instructions. Important safety information is generally preceded by one of three signal words indicating the relative risk of injury. The signal words mean:

WARNING

A hazardous situation which, if not avoided, could result in death or serious injury. You CAN be KILLED or SERIOUSLY HURT if you don't follow instructions.

CAUTION

A hazardous situation which, if not avoided, could result in minor or moderate injury. You CAN be moderately HURT and also may suffer property damage if you don't follow instructions.

NOTICE

Careful attention is required to this instruction or operation but does generally not relate to personal injury. Damage to your MasterTop® product or other property may result if you don't follow instructions.



Before you begin Installation:

We are excited that you have chosen the MasterTop Sport Bar Cover! This high quality Cover is designed to enhance the appearance of your vehicle. Please note that it is important that you become familiar with the installation process of this product by reading the following instruction sheet and warnings thoroughly. Though we have used only the finest materials in creating this cover, any product that is exposed to the elements requires some general maintenance to keep it looking like new. Please see page 4 for this important maintenance tips. Please also note that it is normal for fabric to contract and wrinkle when stored in the shipping carton. In a few days the fabric will relax and wrinkles will disappear.

NOTICE For a smooth fit and ease of installation, this cover should be installed at temperatures above 72 degrees. Below this temperature, the fabric may contract an inch or more making it difficult to install. We highly recommend taking the cover out of the package and letting it sit inside a warm place or direct sunlight for 1-2 hours before you install the cover. When warm, this cover will install quickly.

When unpacking, carefully check to make sure all parts are included. If any part is missing or broken, please call MasterTop customer service at 720-575-5440.



Pre-Installation Notes for Sport Bar Covers:

If you have a top on your vehicle: The top and the door surrounds will need to be removed before starting this installation. Remove the factory Sport Bar Cover from the vehicle. The factory cover will zip off the main hoop and rear legs.

NOTICE This product has been designed to fit Jeep vehicles that have the factory Sport Bar Covers removed from the vehicle. Do not try to install these covers over your factory covers as they will be too small and damage to the product can occur. On 2004-2006 Models, the molded foam on the Sport Bar will remain on the vehicle.

If you have a top on your vehicle it will need to be removed before starting this installation.

Pre-Installation of Sport Bar Covers:



If you have a Sound Bar or Sound Pods on your vehicle:

It will be easier to install your Sport Bar Covers if the factory Sound Bar or Sound pods are unbolted during installation.

Unscrew the two T30 Torx bolts that are attaching the sound bar to rear Sport bar supports and set aside. Carefully Disconnect the cable to the Soundbar as shown in figs.1 & 2. Repeat on the other side.


Removal and Replacement of Factory Seat Belt Mounts (Front and Rear)

Installation of this Sport Bar Cover will require you to temporarily disconnect your seat belts from the front and rear Sport Bar.

Using a #50 Torx bit and socket driver, remove the bolt from the Sport bar. Upon removal, be careful not to lose the small plastic washer located between the seat belt and the end of the bolt.

Carefully set the seat belt and bolt assembly on the front/rear seats for re-installation once the new Sport Bar Covers are installed.




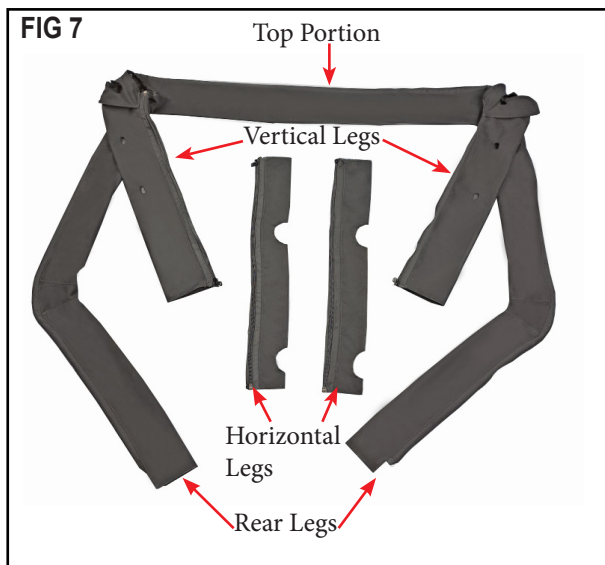

Step 1: Prepare Fabric for Installation

Lay out and open the Sport Bar fabric on a clean dry surface with the vinyl side facing down. Orient where each part of the cover will go on the vehicle.



The Top portion will go over the center hoop, the vertical legs will go down from the top of the center hoop around the seat belt cut outs, the rear legs will attach to the rear Sport Bar braces and the horizontal covers will go over the driver and passenger door horizontal tubes. FIG 7

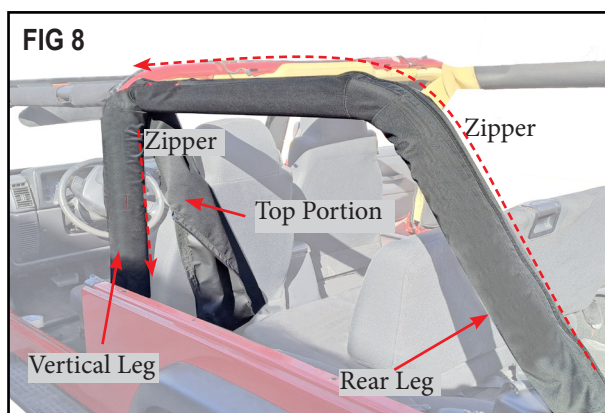

Step 2: Placing the Sport Bar Cover onto the vehicle

This step will be easier with an extra set of hands. Carefully take the cover and place the vertical leg on the driver side of the Sport Bar with zippers on the underside. Install the rear leg, but the zippers must be on top of the sport bar (FIG.8). Make sure the two holes line up as shown in fig 9. Repeat on the passenger side after installing the Top Portion.

Place the Top Portion on the center of the Sport Bar. Notice that the Top Portion has 2 holes one must match to the sportbar hole and the other for the cable to connect the sound bar. FIG 10 & 11.



On the corner of the sport bar locate the two flaps sewn on the vertical leg and hook and loop over top portion and the vertical leg. FIGS. 11 & 12 Repeat on the other side

Carefully connect the cable to the Soundbar and screw the two T30 Torx bolts that you set aside on step 1 to the rear Sport Bar Figs. 13 & 14 Repeat on the other side.





Step 3: Re-Install Seat Belt Bolts

Using a #50 Torx bit and socket driver, re-install the seat belt bolts on the front and rear Sport bars (4 total). See Figs 15 & 16. Make sure these bolts are completely tight and secure. Replace the Bolt cap over the bolt head.

WARNING You must reinstall the seat belt as shown above and ensure it is tight and secure.



Step 4: Installing Over Door Horizontal Legs

Place the Horizontal legs onto each of the horizontal bars. Orient the tubes so that the cut-outs go over the holes for the factory door surround mounts. Zip closed from front to back and slide the cover around the bar so the zipper is facing inside the bar. Figs 17,18 &19 Repeat on the other side of the vehicle.




Care and Maintenance of your MasterTop® Sport Bar Covers:

Your MasterTop Sport Bar Cover is made of the finest materials available but to keep it looking new and for the maximum possible wear, it will need periodic cleaning and basic maintenance. The main threat to your cover is pollutants, dirt and grime. By keeping your cover clean you will prolong the life of your purchase.

We recommend the following to keep your Cover like new:

Washing:

The cover fabric should be washed often using a mild soap, warm water and a soft bristle brush. You can also use special Sport Bar Cover cleaners available on our Distributors websites. Make sure that after cleaning you rinse with clear water to remove all traces of soap to avoid residue. Air Dry. Do not put in

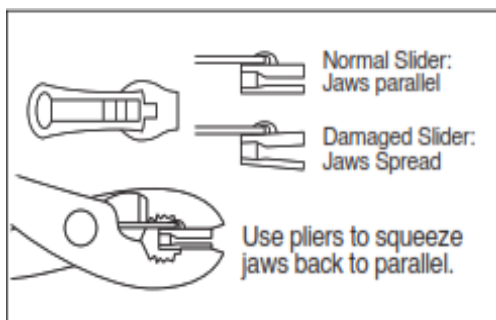

Zippers:

Keeping the zipper cleaned and lubricated with a silicone lubricant (available online) will help prevent damage and keep the zippers in a smooth working condition. If zipper opens behind the slider, the slider may have been spread apart. This problem can usually be fixed by using an ordinary pair of pliers to bring the sides back into parallel. Return slider to the end of the zipper in the normal Open position. Squeeze lightly at first and test zipper. If the zipper continues to remain open squeeze more firmly with pliers and try the zipper again. Repeat procedure until your zipper operates correctly.

For more information on MasterTop:

This and other helpful product information is available on www.mastertop.com
Please visit our website frequently for product updates and exciting news.





Limited 3 Year Warranty

Your MasterTop® accessory is covered by the following Limited Warranty provided exclusively by MasterTop, Inc., 420 J Corporate Circle, Golden, CO 80401.

This Limited Warranty is the only warranty made in connection with your purchase. MasterTop neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or Limited Warranty. This Limited Warranty does not apply and is not cumulative to any accessory or part distributed by any MasterTop distributor for which the Manufacturer provides a separate written warranty.

What is Covered: Subject to the terms, exclusions and limitations herein and with respect only to MasterTop branded accessories first sold in the United States, MasterTop warrants to the initial retail purchaser only that your MasterTop accessory shall be free of defects in material and workmanship; **for a period of 3 years from date of initial retail sale.**

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is **limited to 3 years from date of initial retail sale.** MasterTop reserves the rights to: (a.) require invoice or other proof your product is within the terms of this Limited Warranty as a condition of warranty service and, (b.) make future revisions to this product and Limited Warranty without prior notice or obligation to upgrade your product.

What is Not Covered: Your MasterTop Limited Warranty does not cover products or parts MasterTop determines to have been damaged by or subjected to: (a.) installation damage, alteration, modification, failure to maintain or attempted repair or service by anyone not authorized by MasterTop, (b.) normal wear and tear, cosmetic damage or damage from water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage, (e.) fleet, rental or commercial use, (f.) use in competition or racing.

Remedy Limited to Repair/Replacement: The exclusive remedy provided hereunder shall, upon MasterTop inspection and at MasterTop's option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration on MasterTop Products should first contact MasterTop to obtain a RGA number (720-575-5440). All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages

- Your Rights Under State Law:

In consideration of the purchase price paid, neither MasterTop nor any independent MasterTop distributor /licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This Limited Warranty gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and/or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

© MasterTop, Inc. 2024. All Rights Reserved. The terms MasterTop® and MasterTwill® are Registered Trademarks of MasterTop Incorporated, Registered in U.S. Patent and Trademark Office.

www.MasterTop.com

Part # 941097.01 Version 26.2.24 AM

