



INSTALLATION GUIDE

PERFORMANCE AIR INTAKE, FITS 2024+ TOYOTA TACOMA
SKU: MMAI-TAC-24

TABLE OF CONTENTS

1. RESOURCES & CONTACT INFO
2. EXPLODED VIEW
3. IMPORTANT SAFETY INFORMATION
REQUIRED TOOLS
INSTALL TIME & DIFFICULTY
6. DISPOSAL & WARRANTY INFORMATION

RESOURCES & CONTACT



CALL 1.877.466.4744

CUSTOMER SERVICE HOURS: MON-FRI 9:00AM-7:00PM EST



@MISHIMOTO



@GOMISHIMOTO



MISHIMOTO



@MISHIMOTO




ENGINEERING BLOG

WWW.MISHIMOTO.COM/ENGINEERING

PARTS BREAKDOWN		
PART NUMBER	DESCRIPTION	QTY
MM2546-01	AIRBOX	1
MM4737	PLUG	1
MM4711	GROMMET	1
MM10225-01	MAF HOUSING	1
MM4724-01	COUPLER	1
MM1174-13	M4 LOCK WASHER	2
B4X0.7-10A	M4X10MM BUTTON HEAD BOLT	2

PARTS BREAKDOWN		
PART NUMBER	DESCRIPTION	QTY
MM1325-11	70-90MM WORM GEAR CLAMP	2
MM79-03	AIR FILTER	1
	AIR FILTER CLAMP	1
MM1164-01	ZIP TIES	2

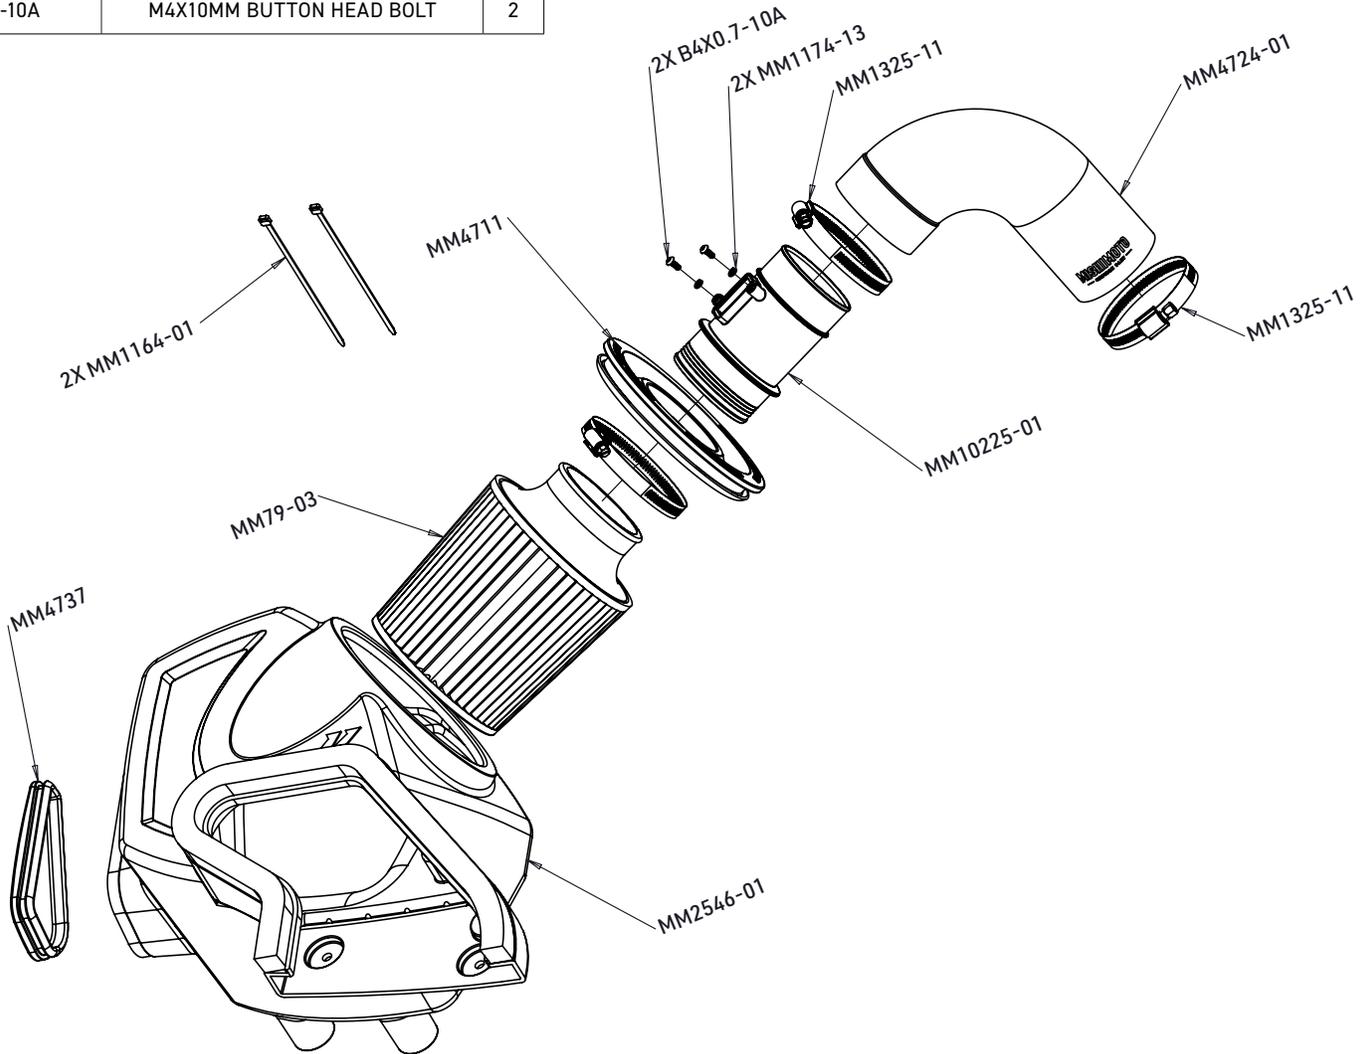

IMPORTANT SAFETY INFORMATION

- › Mishimoto recommends you use safety glasses and protective gloves during the installation of our products
- › Raise vehicle only on jack stands or on a vehicle lift
- › Allow vehicle to cool completely prior to attempting installation
- › Do not run the engine or drive the vehicle while overheating; serious damage can occur
- › Please dispose of any liquids properly
- › Mishimoto is not responsible for any vehicle damage or personal injury due to installation errors, misuse, or removal of Mishimoto products
- › If you need any assistance while installing our products, reach out to our Customer Service Team at 1-877-466-4744

REQUIRED TOOLS

TRIM REMOVAL TOOL, PICK TOOL,
OR SMALL FLAT-HEAD SCREWDRIVER
PHILIP HEAD SCREWDRIVER
¼ RATCHET AND EXTENSION
7MM, 8MM, AND 10MM SOCKETS

INSTALL TIME: .5 HOUR


INSTALL DIFFICULTY: 

INSTALLATION INSTRUCTIONS

1. Remove the 4x pop clips securing the inlet air scoop (push the center of the clip down to disengage the barb), then remove the air scoop.



2. Remove the small ducting piece from the lower airbox.

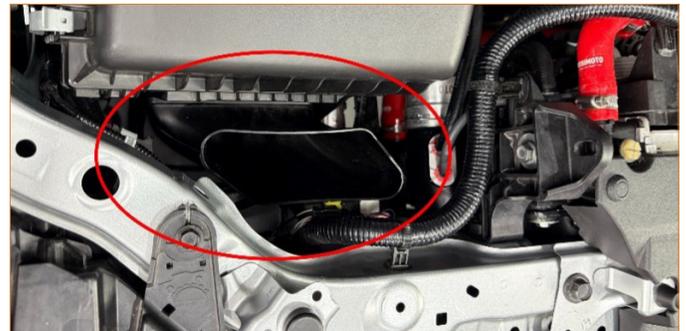

3. Disconnect the MAF sensor plug and release the clip holding the MAF sensor harness.



Continued on next page

4. Loosen the 2x clamps on the rubber intake hose, pull the hose off of the airbox, and then remove the airbox and hose from the engine bay.



5. Remove the 3x rubber grommets from the stock airbox and install them on the Mishimoto airbox.



6. Remove the MAF sensor from the stock airbox and install it on the Mishimoto MAF housing with the included M4 hardware.



7. Assemble the large rubber grommet and air filter with the MAF housing as shown, and ensure the grommet is fully seated on the flange of the MAF housing. Tighten the worm gear clamp on the air filter.




8. Insert the MAF housing, grommet, and air filter assembly into the airbox. Push the assembly along the edge of the large grommet to engage the locking lip. Then, rotate the assembly back and forth slightly to ensure the lip is fully seated.



Continued on next page


9. Slide the larger end of the silicone coupler onto the MAF housing, then slip the 2x worm gear clamps onto the coupler. Do not tighten the clamps yet.

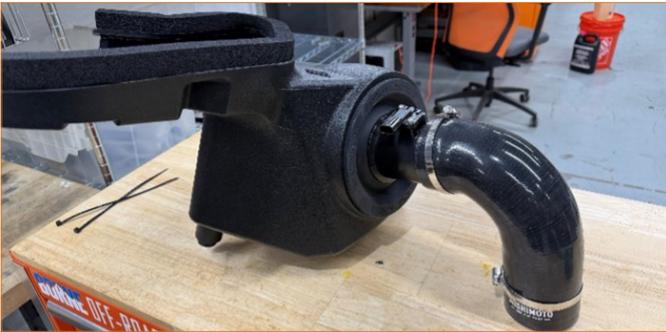

10. An optional rubber plug is included to seal off the secondary air inlet port on the fender side of the airbox. The secondary air inlet port helps maximize airflow and improve intake sound for city driving and light off-road adventures in relatively clean conditions. For desert driving or extremely dusty environments and water fording scenarios, it is recommended to seal off the secondary inlet port with the provided plug to keep the filter clean and maintain the water fording level at the OEM design.




11. Install the Mishimoto intake assembly into the engine bay by engaging the 3x bottom grommets with the 3x pegs, as shown. Adjust the silicone coupler to align with the plastic turbo inlet pipe, then tighten the 2x worm gear clamps.

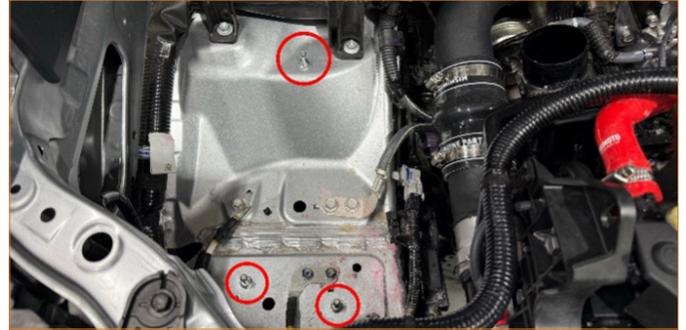

12. Reconnect the MAF sensor and secure the harness with the provided zip tie as shown.



13. Use 2x out of the 4x pop clips previously removed from the stock air scoop to secure the front of the air box to the radiator support.

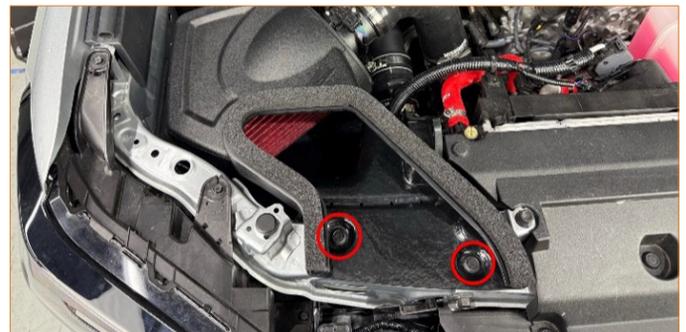

Continued on next page

DISPOSAL INSTRUCTIONS

- › Do not dispose of any product as unsorted municipal waste. Use separate collection facilities. Contact your local authority for information regarding the collection systems available.
- › Never improperly dispose of any coolant, oil, or other chemicals

WARRANTY INFORMATION



- › All claims must be accompanied with a picture of the Mishimoto product showing the issue for which the claim is being submitted.
- › Mishimoto asks that the customer inspect their purchased item for any damage immediately upon arrival.
- › Any product deemed dead on arrival (DOA) must be claimed within 14 business days of delivery. Claims outside of this time frame will not be covered under the Mishimoto Lifetime Warranty.
- › This warranty does not include payment and/or reimbursement of the cost of labor in connection with the removal of any product returned pursuant to the warranty policy or in connection with the installation of any replacement items provided under the warranty policy.
- › Mishimoto has the right to refuse a claim at any time.

- › When Mishimoto accepts a claim, Mishimoto retains full discretion to choose if it will: (i) repair or replace purchaser's original Mishimoto product; (ii) replace purchaser's original Mishimoto product with the most current available model; or (iii) provide the purchaser with a gift card redeemable on **Mishimoto.com** in the amount of the original purchase price of the original Mishimoto product. The provision of a replacement of a Mishimoto product is subject to availability and Mishimoto retains the right to substitute any warranty claim item with a comparable item or credit at any time.
- › If Mishimoto determines that it will provide a replacement item in connection with a claim under this warranty policy, and such item is out of stock, Mishimoto will place the customer on backorder and ship the replacement product to the purchaser once it becomes available.
- › Mishimoto is not liable for incorrect shipments in connection with a claim if a claim form is completed incorrectly, or if a model number is not included in a claim.
- › If you have a vehicle equipped with an automatic transmission, please make sure to specify this within the text box on the claim form. Mishimoto is not responsible for incorrect replacement shipments if transmission type is not indicated.



WARNING
Cancer and
Reproductive Harm
www.P65Warnings.ca.gov

- › This product can expose you to chemicals which are known to the state of California to cause cancer. For more information visit:
www.p65warnings.ca.gov