

### KEY TO COMPONENTS

- A. 1 ea. License plate holder
- B. 2 ea. Lug nuts
- C. 2 ea. M8x1.25x20mm hex head bolt
- D. 2 ea. M8 flat washer
- E. 2 ea. M8 split washer
- F. 4 ea. M6x1.0 button head bolt
- G. 4 ea. M6x1.0 Flange nut


### TOOLS NEEDED

Socket drive  
22mm socket  
13mm Wrench  
Allen wrench set


## License Plate Bracket Installation Instructions

**PART NUMBER 51-8420**  
**FITS JEEP WRANGLER JL**  
**18-19**

A

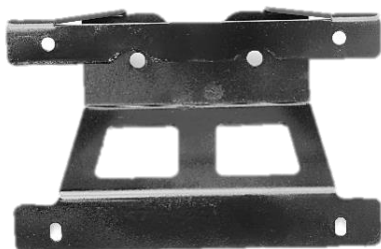

B



C



D



E



F



G




Please take a few minutes to read and thoroughly familiarize yourself with the installation procedures outlined in this manual. Following the steps as outlined will save you time and help reduce mistakes. Once the instructions are reviewed, if you feel that you are not capable of safely installing the parts seek the help of a qualified installation expert to help you complete the job. The manufacture is in no way responsible for any personal injury or vehicle damage that may occur during the installation.

### California Proposition 65 Warning!

This product may contain one or more chemicals known to the State of California to cause cancer and birth defects or other reproductive harm. For more information go to [www.P65Warnings.ca.gov](http://www.P65Warnings.ca.gov).


## INSTALLING LICENSE PLATE HOLDER

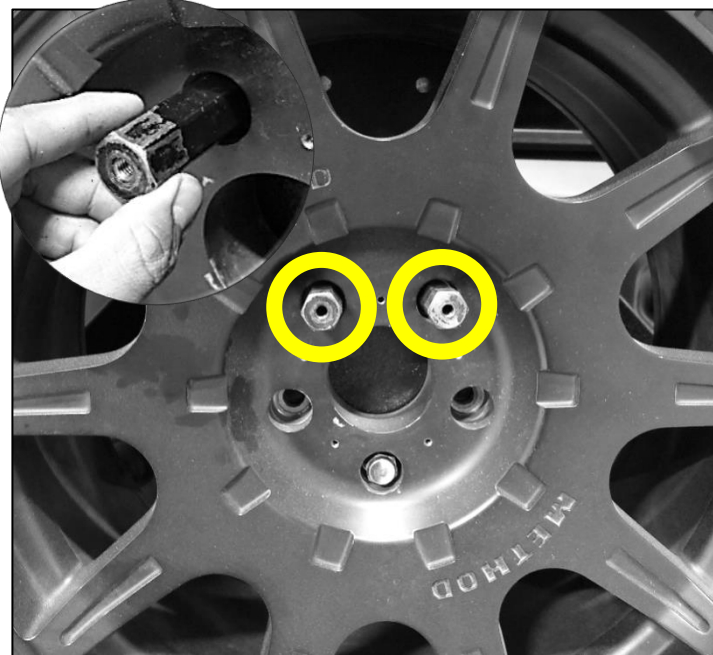

**Step 1.**  
Start a supplied lug nut (B) onto tire carrier as shown. Tighten down using a 22mm socket. Repeat step for remaining lug nut.



**Step 2.**  
Place supplied license plate holder (A) onto the tire carrier as shown. Line up the holes in the holder with the holes on the lug nuts.

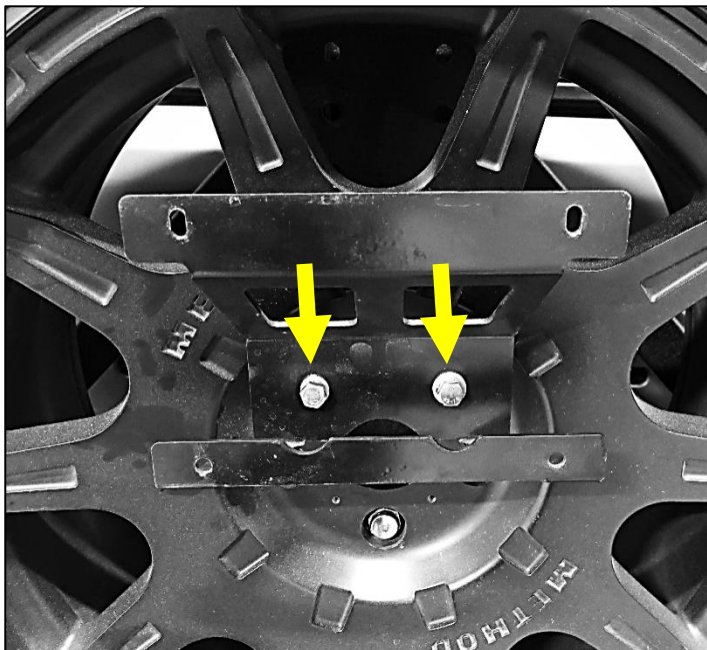

**Step 3.**  
While holding the license plate holder in place, place a supplied M8x1.25x20mm hex head bolt with supplied M8 split washer (E) and supplied M8 flat washer (D) through the hole in the holder and onto the lug nut. Tighten down using a 13mm socket. Repeat step for remaining hex head bolt.



This completes the installation.