


Installation Instructions

Rear Storage Vault 76-87 CJ7, 87-95 YJ, 97-06 TJ Part # 2761

Read instructions entirely before installing and using this part. Drilling may required to install this part.

Parts Included	Qty
Storage Box	1
Light Kit	1
8 x 25 mm Bolt (97-02 TJ)	2
8mm Flat Washer (97-02 TJ)	2
7/16" x 1 1/4 " Hex Bolt (CJ,YJ, 97-02 TJ)	2

Parts Included	Qty
10 x 25 mm Hex Bolt (CJ,YJ,03-06 TJ)	6
10mm Flat Washer (CJ,YJ,03-06 TJ)	4
10mm Lock Nut (CJ,YJ)	2
7 /16" Flat Washer (CJ,YJ,97-02 TJ)	4
7/16" Lock Nut (Universal)	2

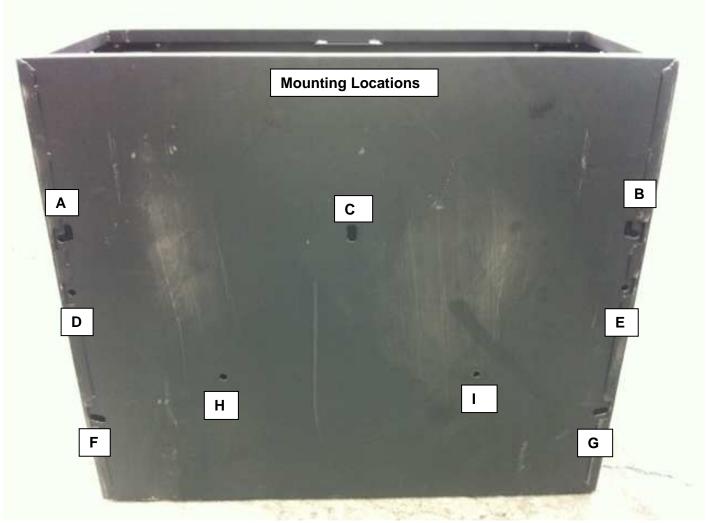

(Fig 1)



Installation Instructions

Rear Storage Vault 76-87 CJ7, 87-95 YJ, 97-06 TJ Part # 2761

Step 1:	Remove the seat and all seat mount brackets.

- **Step 2:** Remove drawer from box and set box in the back of the vehicle.
- Step 3: Secure with two 7/16" bolts/washers using mounting holes A and B
- Step 4: Optional If more solidity is needed, use holes F and G as a guide to mark holes in the vehicle. Once holes are marked remove box and drill holes out using a ½" bit. Place box back into vehicle and secure these holes using the include 10 mm bolts/washers/nuts.

76-86 CJ-7

- **NOTE:** Use Extreme caution when drilling. Check under vehicle before doing so.
- **Step 5:** Once box is secure to the floor, carefully place drawer back into box.

87-95 YJ

- **Step 1:** Remove the seat and all seat mount brackets. Also remove the female portion of the seat belts.
- **Step 2:** Remove drawer from box and set box in the back of the vehicle.
- **Step 3:** Secure with one 7/16" bolt using mounting hole C
- Step 4: Use holes F and G as a guide to mark holes in the vehicle. Once holes are marked remove box and drill holes out using a ½" bit. Place box back into vehicle and secure these holes using the included 10 mm bolts/washers/nuts.
- **NOTE:** Use Extreme caution when drilling. Check under vehicle before doing so.
- **Step 5:** Once box is secure to the floor, carefully place drawer back into box.



Rear Storage Vault 76-87 CJ7, 87-95 YJ, 97-06 TJ

Installation Instructions

Part # 2761

97-02 TJ

- Remove the seat and all seat mount brackets. Also remove the female portion of the seat belts. **Step 1:**
- Remove drawer from box and set box in the back of the vehicle. Step 2:
- Secure with one 7/16" x bolt using mounting hole C Step 3:
- Secure the back of the box using the included 8mm bolts/washers in mounting holes F and G. Step 4:
- Once box is secure to the floor, carefully place drawer back into box. Step 5:

03-06 TJ

- Remove the seat and all seat mount brackets. Also remove the female portion of the Step 1: seat belts. (Fig 2)
- **Step 2:** Remove drawer from box and set box in the back of the vehicle. (Fig 3)
- Step 3: Secure with four 10 mm bolts/washers using mounting holes A, B, G, F. (Fig 3)
- Optional- The center seat belt bolt can be re-used in mount hole C. (Fig 4) Step 4:
- Once box is secure to the floor, carefully place drawer back into box. (Fig 5, 6) Step 5:


Universal Mount

- Remove drawer from box and set box in the back of the vehicle. **Step 1:**
- Mark four of any holes that seem to be the best option making sure they will not interfere **Step 2:** with anything underneath. Once holes are marked remove box and drill holes out using a ½" bit.
- Place box back into vehicle and secure these holes using the included two 7/16" x bolts/washers/ Step 3: nuts and two 10mm bolts/washers/nuts
- Once box is secure to the floor, carefully place drawer back into box. Step 5:



Installation Instructions

Rear Storage Vault 76-87 CJ7, 87-95 YJ, 97-06 TJ Part # 2761

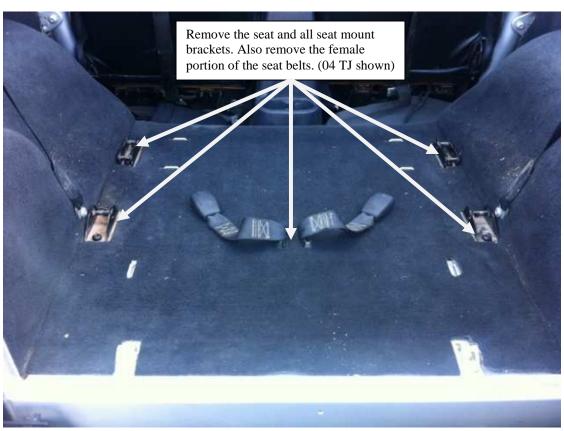

(Fig 2)





(Fig 3) (Fig 4)



Installation Instructions

Rear Storage Vault 76-87 CJ7, 87-95 YJ, 97-06 TJ Part # 2761





(Fig 6)

(Fig 5)



Always use caution when drilling, check for any obstructions before drilling.

Note: Before tightening completely make sure drawer clears tailgate striker. (Fig 7)

Removing the Drawer/Adjusting the Lock

CAUTION!


Pull the drawer out and release side locking clamps. (Push down on the left side (Fig 9) and push up on the right side.) This will enable you to remove it.

The latch is adjustable in order to get a tighter or lose fitting door by loosening, turning and the tightening the two nuts located on each side of the latch (Fig 10)



Installation Instructions

Rear Storage Vault 76-87 CJ7, 87-95 YJ, 97-06 TJ Part # 2761





(Fig 10)

Limited Warranties

Smittybilt's products are covered under the following limited warranties only. Note that the duration of the limited warranty differs according to the material and finish of the product purchased. Subject to the duration and conditions of the limited warranty stated below, Smittybilt warrants to the original retail purchaser that its products are free from defects in material and workmanship. All other warranties and representations express or implied, are hereby disclaimed, including fitness for merchantability and buyer's intended use or purpose. All parts are sold "AS IS" except for the limited warranties granted herein. Buyer assumes all risks as to the selection, suitability and performance of all goods and products selected. This limited warranty does not cover damage or impairment in any part due to misuse, improper installation, accident or contact with on-road or off-road hazards, product modification, improper or inadequate cleaning and/or maintenance. Smittybilt is not responsible for items damaged during shipping. This warranty is not transferable from the original buyer. For the original Buyer to be eligible for the limited warranty coverage, the Buyer must provide proof of purchase. Smittybilt strongly recommends returning the warranty registration card.

Customer's remedy hereunder shall be limited only to repair or replacement (at Smittybilt's option) of any defective part(s) returned to Smittybilt at customer's expense. The determination of whether or not a returned part is defective or subject to coverage under the limited warranties stated herein shall be made at Smittybilt's sole discretion.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

Warning

Rollover and other types of vehicle accidents may result in serious injury or death to you, your passengers and others sharing the road. Smittybilt accessories are decorative and are not intended to reduce or avoid injury or damage in the event of an accident. The weight and location of Smittybilt accessories may affect your vehicles' handling, stability and performance, creating an increased risk of accident or rollover. Before installing any accessory, check state laws and assure that the accessory will not obscure any lights or interfere with proper operation on your vehicle's safety equipment. Consult your owner's manual and the Smittybilt instructions, or additional safety information. Smittybilt products, nor the warnings contained herein, are not a substitute for your safe driving. Don't drink and drive, always use seat belts and don't drive faster than conditions permit.