



WWW.SMITTYBILT.COM

Installation Instructions

SRC Over-Size Tire Carrier
07-10 Jeep Wrangler/Unlimited
Part # 2743

NOTE: Carefully read instructions entirely before assembling/installing this product.

Parts Included	Qty
Tire Carrier	1
Brake Light Bracket	1
Tire Stop Bar	2
Tire Handle	1
Tire Hold-down Bracket	1
3/8" Spacer	8
1/4" Flat Washer	2

Parts Included	Qty
8 x 70mm Hex Bolt	4
8mm Flat Washer	4
1/4"-20x 3/4" Pan Head Screw	2
1/4"-20 Hex Nut	2
1/4" Lock Washer	2
#10 x 1 1/4" Tapping Screw	2

Step 1: Remove your spare tire. Now take off your 3rd brake light from its housing by removing the four screws on the back of it. Follow the wiring and disconnect at plug. Set the light and screws to the side for use later.

Step 2: Remove the factory tire carrier by removing the 8 bolts that secure it to the tail gate. Set bolts to the side for use later.

Step 3: Place the tire that you are going to be using flat on the ground, with the outside of the tire facing down. Set your new tire carrier base on tire with the tube portion going through the center of the wheel. While pushing the tire carrier down (making it even the tire) lay the brake light bracket on the tire carrier between the two flanges. Put the light bracket so the top of it where the light lens will be placed is just above the tire. Align the bracket holes to the best hole locations on the tire carrier. Secure tightly using the two supplied pan head screws, lock washers and nuts. (Fig A)

Step 4: Measure the distance from the bottom set of holes on the tailgate where the factory tire carrier was mounted on; to a point on your bumper that will be below the spare tire. Set your new tire carrier back on your spare tire like you had done in Step 3. Measure from the bottom of the tire upwards the same distance that you just measured. Find the holes on the tire carrier that are the lowest close to that measurement. (Commonly 31" and smaller tires will use the top set of holes, 35" tires will use the middle set of holes and 37" tires will use the bottom set of holes)

Now mount your new tire carrier on the tailgate using 4 of the factory bolts you previously removed in the inner set of holes. (Fig B)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220




WWW.SMITTYBILT.COM

Installation Instructions


SRC Over-Size Tire Carrier
07-10 Jeep Wrangler/Unlimited
Part # 2743

Note: If your vehicle is equipped with a 9" x 5" exhaust vent minor trimming will be necessary.

Loosely attach the tire carrier to the back of the jeep and mark where the vent will need to be trimmed. (Fig C) Remove tire carrier and then proceed to carefully trim the edge of the vent. This can easily be done with a sharp utility knife. (Fig D)

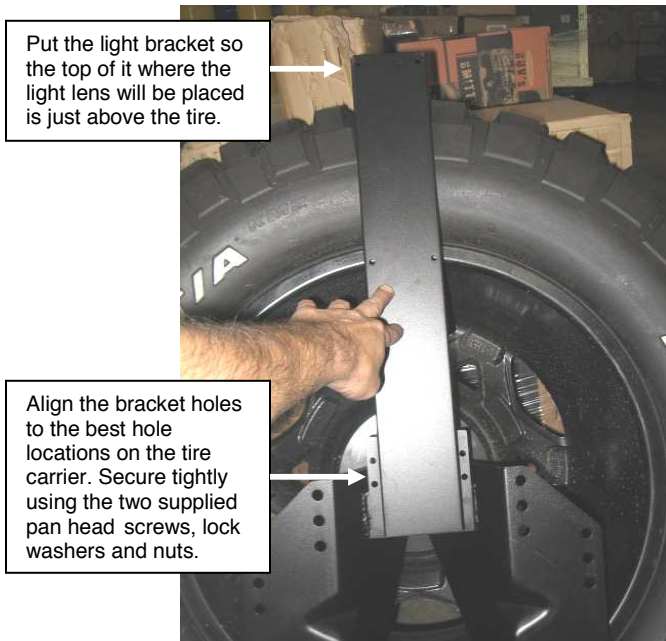


(Fig A)

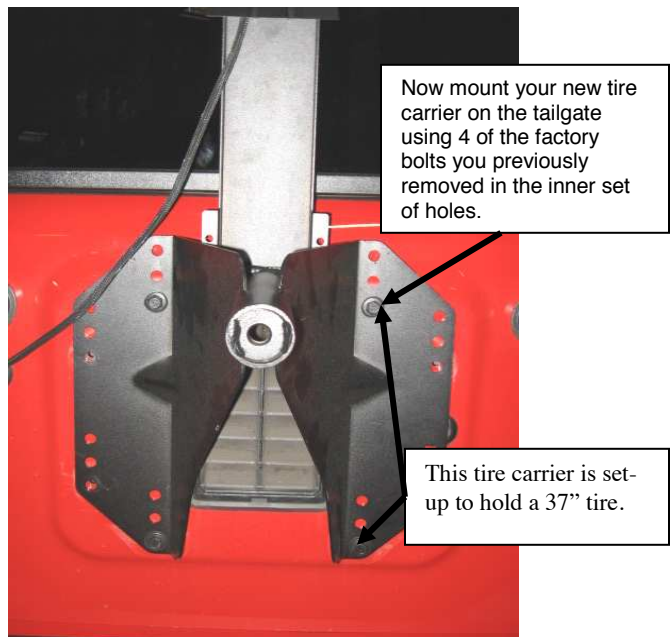

(Fig B)



(Fig C)

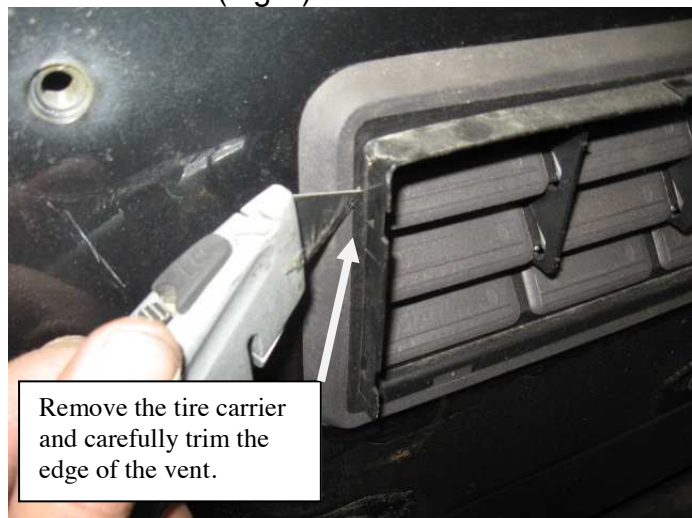

(Fig D)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220




WWW.SMITYBILT.COM

Installation Instructions

SRC Over-Size Tire Carrier
07-10 Jeep Wrangler/Unlimited
Part # 2743


Step 5: Now plug the light wire back into the brake light. Attach the brake light to the brake light bracket with the two supplied tapping screws in the top two hole locations and use two of the original screws you removed in step 1 for the bottom tow hole locations. (Fig E, F)

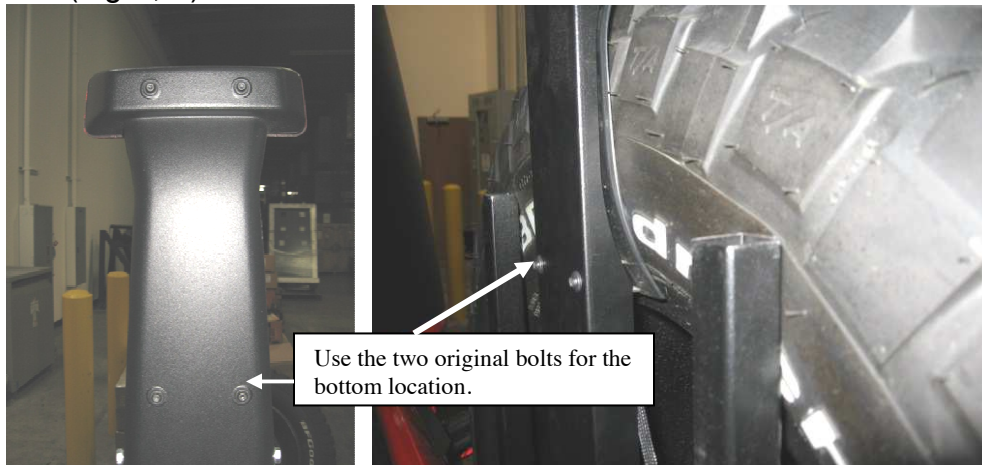

(Fig E)

(Fig F)

Step 6: Mount the tire stop bars on the outside holes on the tire carrier. The long end of the bars go toward the top. Mount each bar using the included 8x70mm bolts, flat washers and spacers and secure tightly. (Use two spacers for each bolt, they go between the tire stop bar and the tire carrier.) Fig G, H

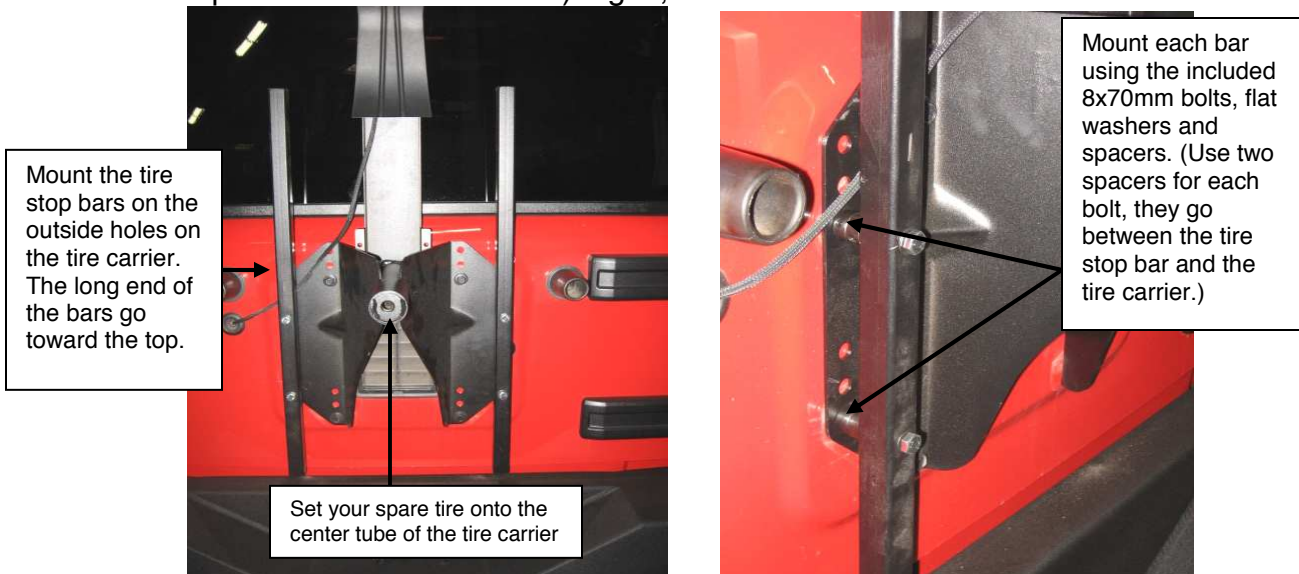

(Fig G)

(Fig H)

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITYBILT.COM

Installation Instructions

SRC Over-Size Tire Carrier
07-10 Jeep Wrangler/Unlimited
Part # 2743

Step 7: Set your spare tire onto the center tube of the tire carrier. (Fig G) Place tire so that two of the lug nut holes are on top (side to side). Place tire hold-down bracket over tube in tire carrier and line up the top two points in two lug holes in the wheel and one in the bottom. Thread the lock down tire handle into the tire carrier. Tighten the handle completely. The tire should be snug against the tire stop bars. (Fig I, J) Installation is now complete. Make sure all hardware is tight and the brake light is operational.

Step 8: There is a slot and a hole located on the hold down bracket. This is in order to place a pad-lock on carrier. The body/bottom of the lock would be on the outside. Make sure its long enough in order to prevent the tire carrier handle from being turned.



(Fig I)



(Fig J)

CARE AND MAINTENANCE

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220



WWW.SMITTYBILT.COM

Installation Instructions

SRC Over-Size Tire Carrier
07-10 Jeep Wrangler/Unlimited
Part # 2743

To protect your investment it is recommended to regularly wash and wax this part. Do not use any type of cleaners that contain abrasives that may damage the finish of your part.

LIMITED WARRANTY

Smittybilt (The Company) warrants to the original purchaser of this product that should the product or any part thereof, under normal use and conditions, be proven defective in material or workmanship within 5 years from the original date of purchase, such defect(s) will be repaired or replaced (At the Company's option) without charge for parts or labor.

To obtain repair or replacement within the terms of the warranty, the product is to be delivered with proof of warranty coverage (e.g. dated bill of sale, receipt), specification of defect, freight pre-paid with Returns Good Authorization Number from Smittybilt to place of purchase. Items returned to Smittybilt without a Returns Authorization Number will be refused and returned to sender at the sender's expense.

This warranty does not apply to any product or part thereof which, in the opinion of the Company, has suffered or been damaged through altercation, improper installation, mishandling, misuse, neglect accident or acts of nature. **THE EXTENT OF THE COMPANY'S LIABILITY UNDER THIS WARRANTY IS LIMITED TO THE REPAIR OR REPLACEMENT PROVIDED ABOVE AND, IN NO EVENT, SHALL THE COMPANY'S LIABILITY EXCEED THE PURCHASE PRICE PAID BY THE PURCHASER FOR THIS PRODUCT.**

This warranty is in lieu of all expressed warranties and liabilities. ANY IMPLIED WARRANTIES, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY SHALL BE LIMITED TO THE DURATION OF THIS WRITTEN WARRANTY. ANY ACTION FOR BREACH OF ANY WARRANTY HEREUNDER INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY MUST BE BROUGHT WITHIN A PERIOD OF 90 DAYS FROM DATE OF ORIGINAL PURCHASE. IN NO CASE SHALL THE COMPANY BE LIABLE FOR ANY CONSEQUENTIAL OR INCIDENTAL DAMAGES FOR BREACH OF THIS OR ANY OTHER WARRANTY, EXPRESSED OR IMPLIED, WHATSOEVER. No person or representative is authorized to assume for the company any liability other than expressed herein in connection with the sale of this product. Some states do not allow limitations on how long an implied warranty lasts or the exclusion or limitation of incidental or consequential damage, therefore above limitations may not apply to you. This warranty gives the purchaser specific legal rights. The purchaser may have additional rights, which vary from state to state.

To assure product quality, Smittybilt reserves the right to change product design, material, specification and finishes without prior notice to customers. This limited warranty gives you specific legal rights and you may also have other rights, which may vary from state to state. Some states do not allow limitations on how long an implied warranty lasts, so the above limitations may not apply as to you. Also, some states do not allow the exclusion or limitation of incidental or consequential damages, so the above limitations or exclusions may not apply to you. Smittybilt reserves the right to discontinue product lines and substitute products, or provide other remedies than those listed in this limited warranty for those discontinued products.

For Technical Support/Warranty Information please call 310-762-9944

Smittybilt, 400 West Artesia Blvd, Compton, CA 90220