

9002-8893/9002-8894

Jeep Wrangler Back-up camera add-on Third Brake LED Light

Items Included in the Kit

Third Brake Light
Phillips screw (only in 902-8894)
Installation Instructions

Required Tools & Supplies

Phillips Screwdriver Plastic Trim Removal Tool Electrical Tape

Please read so you do not <u>VOID</u> the warranty:

If the camera harness is run through the center on the camera bracket, it will cut the camera harness. This will void the warranty on the camera.

NOTE: We strive to provide accurate and up-to-date installation instructions. For the latest full color instructions, as well as an installation video, please visit www.brandmotion.com






Remove Spare Tire

Step 1: Remove spare tire



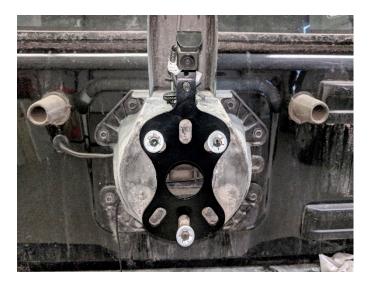

Continue to the next step of the part number of the third brake light that you have.



Install: 9002-8893

Step 1: Locate and remove the two #1 Philips screws from the back-side of Camera.





Step 2: Line the mounting holes from the new brake light bracket up with the mounting holes of the Camera and mounting bracket and reinstall the two #1 Philips screws.



Got to wiring steps next:



Install: 9002-8894

Step 1: Locate and remove one #1 Philips holding Camera to bracket



Step 2: Line the mounting hole from the new brake light bracket up with the mounting hole of the Camera and mounting bracket and reinstall the one #1 Philip screws.



Go to wiring next:



Wiring

Step 1: Route cable along Camera harness and follow same route as factory 3rd brake light harness to factory opening in rear door.









Step 2: Remove cover on inside of rear door and unplug factory 3^{rd} brake light harness and Install new brake light harness.



Step 3: Unplug factory brake harness and plugin our replacement harness





Test brake light and reassemble

Step 1: After testing 3rd brake light. Follow your disassembly steps in reverse order.





