

Standard Width Front Bumper

Installation Manual: for Jeep Wrangler '87 - '06 #12056-1105




PARTS AND TOOLS

TOOL LIST:

Safety Glasses 19MM Socket or Wrench T55 Torx Bit Driver Ratchet

KIT CONTENT LIST:

- A. M12 Hex Bolt (x6)
- B. M12 Flat Washer (x6)
- C. M12 Lock Washer (x6)
- D. Auxillary Light Stone Guard Right (x1)
- E. Bumper Spacer (x2) (For YJ)
- F. Bumper Spacer Small (x2) (For YJ)
- G. Auxillary Light Stone Guard Left (x1)

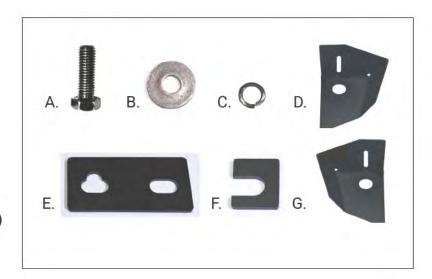



A FEW WORDS ABOUT PRODUCT SAFETY:

Your Carnivore Bumpers are intended to enhance the utility and enjoyment of your Jeep vehicle. Before installation, please review the following safety information and installation recommendations. Throughout these instructions important safety information is generally preceded by one of the three signal words indicating the relative risk of injury, property damage or adverse consequence.

The signal words mean:



A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN DEATH OR SERIOUS INJURY, YOU CAN BE KILLED OR SERIOUSLY HURT IF YOU DON'T FOLLOW INSTRUCTIONS.



A HAZARDOUS SITUATION WHICH, IF NOT AVOIDED, COULD RESULT IN A MINOR OR MODERATE INJURY. YOU CAN BE MODERATELY HURT AND ALSO MAY SUFFER PROPERTY DAMAGE IF YOU DON'T FOLLOW INSTRUCTIONS.

NOTICE

CAREFUL ATTENTION IS REQUIRED TO THIS INSTRUCTION OR OPERATION BUT GENERALLY DOES NOT RELATE TO PERSONAL INJURY. DAMAGE TO YOUR CARNIVORE PRODUCT OR OTHER PROPERTY MAY RESULT IF YOU DON'T FOLLOW INSTRUCTIONS.

BEFORE YOU BEGIN USAGE:

Congratulations on your purchase of the Carnivore Bumpers. Your top-quality bumper mounts directly to the frame of your Jeep Wrangler. When unpacking, check to make sure all parts are included and not damaged due to shipping. If any part is missing or broken, please call Customer Service at 800-745-6037 as soon as possible. Thank you again for your purchase.

AWARNING A

BUMPER NOT INTENDED FOR WINCHES IN EXCESS OF 10,000 LBS. LOAD LIMITS FOR YOUR BUMPER/WINCH MAY BE LESS DEPENDING ON CONDITION OF YOUR VEHICLE AND ATTACHMENTS. FOLLOW ALL INSTRUCTIONS, LIMITATIONS & WARNINGS WITH YOUR VEHICLE, THIS PRODUCT, YOUR WINCH AND SAFE WINCHING PRACTICES SUPPLEMENT.

AWARNING A

TO REDUCE RISK OF SERIOUS INJURY OR PROPERTY DAMAGE: READ ALL SAFETY MESSAGES AND UNDERSTAND ALL INSTRUCTIONS AND PROCEDURE NOTICES BEFORE ATTEMPTING TO INSTALL OR USE THIS PRODUCT.

ACAUTION A

WELDED FRONT BUMPERS ARE HEAVY AND WE STRONGLY SUGGEST THE ASSISTANCE OF AN ABLE-BODIED ASSISTANT DURING LIFTING AND INSTALLATION OF YOUR BUMPER.

ACAUTION A

RISK OF EYE INJURY! SAFETY GLASSES MUST BE WORN AT ALL TIMES WHILE INSTALLING OR MAINTAINING THIS PRODUCT. DO NOT USE IF DAMAGED.

NOTICE

AS YOU UNPACK YOUR FRONT BUMPER, BE CAREFUL NOT TO SCRATCH THE FINISH WITH A KNIFE OR RAZOR. WE SUGGEST PLACING THE UNPACKED BUMPER BACK INTO THE ORIGINAL BOX SO IT DOES NOT GET SCRATCHED BEFORE THE INSTALLATION BEGINS, THIS BUMPER HAS A CUT-OUT FOR A VEHICLE RECOVERY WINCH. THE BUMPER FEATURES AN INTEGRATED WINCH MOUNTING PLATE.


NOTICE

CHECK STATE AND LOCAL HIGHWAY SAFETY LAWS REGARDING PERMITTED BUMPER TYPES AND HEIGHTS.



STEP 1 - FACTORY BUMPER REMOVAL








Put on safety glasses. Using a T55 torx bit driver or socket remove the tow hooks and/or bumper bolts. (Fig 1) Repeat the step for the other side. Remove the lower bumper bolts with and T55 torx bit driver or socket. (Fig 2) Repeat the step for the other side. Remove the factory bumper.

STEP 1 - STONE GUARD INSTALLATION



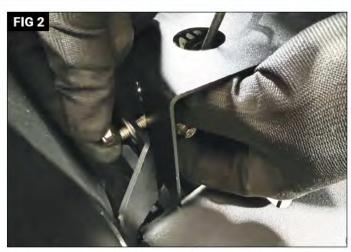

Use the stone guard to mount optional lighting behind the perforated screen in the bumper. With the connecting harness for the light through the wiring hole of the stone guard, insert the mounting bolt from the light into the tab on the bumper behind the screen. (Fig 1) Place a flat washer and nut onto the bolt. (Fig 2) Do not fully tighten.


STEP 2



Once auxiliary light is aimed as desired, tighten bolt as needed. (Fig 3) Repeat the step for other side.



STEP 1 - BUMPER INSTALLATION - TJ






With the help of another person, place the new bumper into position. Thread two M12 bolts, two M12 lock washers and two M12 flat washers with a 19mm wrench or socket to the top of the bumper. Do not fully tighten. (Fig 1) Repeat the step for the other side.


STEP 2 - BUMPER INSTALLATION - TJ

Thread one M12 bolt, one M12 lock washer and one M12 flat washer to the bottom of the bumper. Do not fully tighten. (Fig 2) Repeat the step for the other side. Once the bumper is in position, tighten all bolts. Installation is now complete for your TJ wrangler.



STEP 1 - BUMPER INSTALLATION - YJ

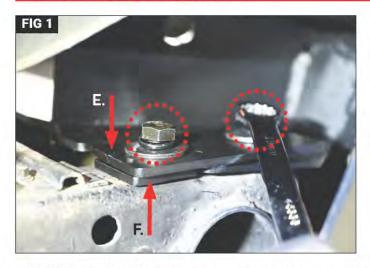



With the help of another person, place the new bumper into position. Place a spacer (F.) on the mounting hole towards the back of the vehicle with the bumper mounting hole towards the front. Place spacer (E.) on top of spacer (F.) and the bumper mounting hole with M12 bolts, M12 lock washers and M12 flat washers. Thread bolts with a 19mm wrench or socket. (Fig 1) Repeat the step for the other side. Thread one M12 bolt, one M12 lock washer and one M12 flat washer to the bottom of the bumper. (Fig 2) Repeat the step for the other side. Once the bumper is in position, tighten all bolts. Installation is now complete for your YJ wrangler.







Carnivore Exclusive Three Year Limited Warranty

Your Carnivore branded accessories are covered by the following Limited Warranty provided exclusively by Carnivore, 1028 Saunders Lane, West Chester PA 19380.

This **Limited Warranty** is the only warranty made in connection with your purchase. Carnivore neither assumes nor authorizes any vendor, retailer or other person or entity to assume for it any other obligation or liability in connection with this product or Limited Warranty. This Limited Warranty does not apply and is not cumulative to any accessory or part distributed by Carnivore for which the Manufacturer provides a separate written warranty.

What is Covered:

Subject to the terms, exclusions and limitations herein and with respect only to Carnivore branded accessories first sold in the United States, Carnivore warrants to the initial retail purchaser only that your Carnivore accessory shall be free of defects in material and workmanship: for a period of three (3) years from date of retail purchase.

This **Limited Warranty** is not assignable and shall terminate upon sale of the vehicle upon which the Carnivore accessory is installed or other transfer to third persons.

All other warranties are hereby disclaimed, except to the extent prohibited by applicable law in which case any implied warranty of merchantability or fitness for a particular purpose on this product is limited to 3 years from date of initial retail sale. Carnivore reserves the rights to: (a.) require invoice or other proof your accessory is within the terms of this Limited Warranty as a condition of warranty service and, (b.) make future revisions to this product and Limited Warranty without prior notice or obligation to upgrade your product.

What is Not Covered:

Your Carnivore Limited Warranty does not cover products or parts Carnivore determines to have been damaged by or subjected to: (a.) installation damage, alteration, modification, combination with other parts, failure to maintain or improper repair or service, (b.) normal wear & tear, cosmetic damage or damage from moisture or water immersion, (c.) Acts of God, accidents, misuse, negligence, inadequate mounting or impact with vehicle(s), obstacles or other aspects of the environment, (d.) theft, vandalism or other intentional damage.

Remedy Limited to Repair/Replacement:

The exclusive remedy provided hereunder shall, upon Carnivore inspection and at option, be either repair or replacement of product or parts (new or refurbished) covered under this Limited Warranty. Customers requesting warranty consideration should first contact Carnivore to obtain a RGA number (610-701-3336). All labor, removal, shipping and installation costs are customer's responsibility.

Other Limitations - Exclusion of Damages - Your Rights Under State Law:

In consideration of the purchase price paid, neither Carnivore nor any independent Carnivore distributor/licensee are responsible for any time loss, rental costs, or for any incidental, consequential, punitive or other damages you may have or incur in connection with any part or product purchased. Your exclusive remedy hereunder for covered parts is repair/replacement as described above.

This **Limited Warranty** gives you specific rights. You may also have other rights that vary from state to state. For example, some states do not allow limitations of how long an implied warranty lasts and /or do not allow the exclusion or limitation of incidental or consequential damages, so the limitations and exclusions herein may not apply to you.

Carnivore 2022. All Rights Reserved. A4 Version 10/3/2022

Instructions Part #12999.3293

